

# CLSI-C6

## iLux™ Integrated Lighting System - International Version

The iLux CLSI-C6 is a complete, integrated lighting system designed for wall mount installation in boardrooms, auditoriums, home theaters, or anywhere versatile and cost-effective control of lighting and shades is required. Crestron's reputation for innovation and reliability, combined with high-quality integrated dimming, native shade control, configurable rocker buttons, extensive integration ability and many other advanced features make iLux the ideal choice for all types of room lighting and shade control applications.

### 6 Channel Dimming

The CLSI-C6 features six channels of dimming for 230V incandescent, magnetic low-voltage, neon/cold cathode, and 2-wire dimmable fluorescent loads. On/off switching of many non-dimmable lighting loads is also possible. Each channel will handle up to 800 watts individually, with a total rating of 2300 watts for the complete unit.

### 6 Group Shade Control

Using Crestron's networked Shade and Drape Controllers<sup>1</sup>, the CLSI-C6 enables versatile control of a roomful of motorized window treatments, screens and lifts in up to 6 shade groups.

### Versatile Front Panel Controls

The deceptively clean front panel actually affords an extensive amount of control and customization to suit each unique room application. Large ON and OFF buttons provide instant access to the "On" and "All Off" scenes, while the six main buttons can be set up to recall additional scene presets, adjust shades, or perform a host of other functions. The buttons' "rocker" action enables intuitive, tactile control for adjusting lighting levels and shade positions. An additional "Up/Down" button is configurable for a variety of functions, including use as a master lighting or shade control, or as a "shift" button to expand the capabilities of the six main buttons.

With each new scene selection, window shades reposition and lights fade elegantly to their new settings. The selected scene is indicated by a white LED beside each button, and the customizable label strip allows each button to be clearly labeled using Crestron Engraver software or standard 3/8" tape labels. Dimming levels and shade positions are displayed graphically on 6 green LED bargraphs accessible behind the flip-up front cover. Additional controls and a numeric display hidden beneath the cover enable setup without requiring a PC. Enhanced customization is provided via the PC programming port using iLux Designer software.

### Multipoint Keypad Control

Up to 16 Crestron keypads<sup>1</sup> may be connected to a single CLSI-C6, providing versatile multipoint control for rooms with multiple entrances or work areas.

### Multi-Unit Expansion

One CLSI-C6 master will support up to 8 additional CLSI-C6 (or CLSI-C6M) units, enabling systems of up to 54 lighting zones and 54 shade groups. Commands for typical functions like scene recall, scene off, master dimming, and occupancy status are shared between the CLSI-C6 units. Each individual unit can still support a complete assortment of local devices including keypads, shade controllers, and motion detectors.



### Control System Integration

The CLSI-C6 features two separate Cresnet® control networks, one for local devices and one for connection to a 2-Series control system. Connecting the CLSI-C6 to a control system allows its functions to be controlled from touchpanels, RF wireless remotes, and even computers. The control system interface also enables extensive flexibility for integration with other systems such as security, HVAC and energy management, plus remote monitoring via SNMP and Crestron **RoomView®** applications.

### infiNET™ Wireless Option

The CLSI-C6RF model employs Crestron's infiNET wireless technology instead of Cresnet for its connection to the control system. A single **C2N-MNETGW** gateway<sup>1</sup> connected to the control system enables 2-way wireless communications between the iLux system and the central control system, affording the same essential benefits of a wired connection — without the wire. A Cresnet port is still provided on the CLSI-C6RF for the connection of local devices such as shade controllers, keypads, and additional wired CLSI-C6 units. Several infiNET-based iLux systems can coexist on one infiNET wireless network along with other infiNET dimmers, switches, and thermostats.

To add built-in motion detection, specify the **CLSI-C6M** model.

> *Wall mount integrated lighting and shade control*

> *6 channels of dimming or switching*

> *6 groups of shade and drape control*

> *Linkable for up to 54 lighting channels and 54 shade groups*

> *Up to 16 user-settable scenes*

> *7 configurable "rocker" buttons with customizable label strip*

> *Large ON and OFF buttons*

- > *Flip-up front cover reveals setup controls and programming port*
- > *6 bargraphs show lighting levels and shade positions*
- > *Easy setup from front panel or iLux Designer software*
- > *Supports multipoint control using up to 16 keypads*
- > *Optional IR remote*
- > *Master air-gap relay*
- > *Integrates with 2-Series Control Systems via Cresnet or infiNET<sup>2</sup>*
- > *Energy saving ASHRAE 90.1/LEEDS compliant*
- > *Available in almond, black, or white*

## SPECIFICATIONS

### Load Ratings

**Dimmer Channels:** 6

**Maximum Per Channel:** 800 Watts/VA (3.5 Amps @ 230 Volts AC), expandable via Expansion Modules (sold separately)

**Minimum Per Channel :** 25 Watts/VA (0.108 Amps @ 230 Volts AC)

**Module Total:** 2200 Watts/VA (10 Amps @ 220 Volts AC);

2300 Watts/VA (10 Amps @ 230 Volts AC);

2400 Watts/VA (10 Amps @ 240 Volts AC)

**Load Types:** Incandescent, Magnetic Low-voltage, Neon/Cold Cathode, Dimmable 2-Wire Fluorescent, & Non-Dim Lighting

### Power Requirements

220 to 240 Volts AC, 50/60Hz Line Power

### Connections

**LOCAL DEVICES:** (1) 4-pin 5mm detachable terminal block;

Cresnet Master port for local devices including:

- C2N-DB and CNX-B Series keypads, 16 maximum;
- **C2N-SSC-2** and **C2N-SDC-DC** shade controllers; 16 maximum;
- Additional CLSI-C6 or **CLSI-C6M** units, 8 maximum;

Additional power supply required beyond 4 devices; C2N-SDC-DC always requires an additional power supply

**CONTROL SYSTEM:** (1) 4-pin 5mm detachable terminal block;

Cresnet Slave port for connection to a 2-Series control system;

Note: This port is not included on the CLSI-C6RF model

**HOT:** (1) Captive screw terminal, line power input

**LOAD1 - LOAD6:** (6) Captive screw terminals, dimmer channel outputs 1 - 6

**NEUTRAL:** (1) Captive screw terminal

**GROUND:** (1) Captive screw terminal

**PC (front):** (1) 3.5mm TRS mini-phone jack, RS-232 Programming port

### Controls

**Buttons 1 - 6:** (6) 3-position rocker pushbuttons; configurable to recall (or toggle recall/off) individual scenes, control shades, or for master lighting or shade control; "scene mastering" option enables manual dimming utilizing rocker button action; also used to adjust lighting levels when in "Lighting" mode and shade positions when in "Shades" mode; additional functionality configurable via software

**Up/Down Button:** (1) 3-position rocker pushbutton; configurable for master lighting or shade control, or as a "shift" for Buttons 1-6; additional functionality configurable via software

**ON:** (1) pushbutton, recalls "On" scene

**OFF:** (1) pushbutton, turns all lights off

**LIGHTS, SHADES:** (2) Pushbuttons, select "Lights" or "Shades" modes

**SAVE, CANCEL, UP, DOWN:** (4) Pushbuttons, navigate and execute setup functions

**Reset:** Recessed miniature pushbutton for hardware reset

**Dimming Ramp Rate:** 5 seconds (default), software adjustable 1 to 10 seconds

**Scene Fade Time:** 2 seconds (default), software adjustable 0 seconds to 99 minutes

### LED Indicators

**Scenes:** (6-white) Correspond with each "Scene" Button

**High/Low:** (2-white) Indicate "Shift" status

**ON:** (1-white) Indicates "On" Scene is selected

**LIGHTS, SHADES:** (2-green) Indicates "Lights" or "Shades" mode is active

**SAVE, CANCEL:** (2-green) Correspond with "Save" and "Cancel" Buttons

**MIN, SEC:** (2-green) Indicates display of "Minutes" or "Seconds"

**1 - 6:** (6-green) 7-Segment bargraphs, indicate lighting levels and shade positions

**Numeric Display:** (2-green) 8-Segment digits, indicates modes and setup values

### IR Receiver

**Reception Frequency:** 36 kHz

Requires **CLS-IRHT8** IR remote, sold separately

### Wireless (CLSI-C6RF Only)<sup>2</sup>

**RF Transceiver:** 2-way RF, 2.4 GHz ISM Channels 11-26 (2400 to 2483.6 MHz), IEEE 802.15.4 compliant

**RF Output Power:** 10 mW

**Range (typical):** 150 feet indoor, 250 feet outdoor;

Subject to site-specific conditions; range is increased by adding additional devices or **C2NI-MNETRPT** repeater;

### Environmental

**Temperature:** 32° to 104°F (0° to 40°C)

**Humidity:** 10% to 90% RH (non-condensing)

### Enclosure

Mounts in a 4-gang electrical box, 3-1/2" deep minimum

### Dimensions

**Height:** 4.48 in (11.38 cm)

**Width:** 8.89 in (22.58 cm)

**Depth:** 2.47 in (6.25 cm)

### Weight

1.43 lbs (0.65 kg)

### AVAILABLE MODELS

**CLSI-C6A:** iLux Integrated Lighting System - International Version, Almond

**CLSI-C6B:** iLux Integrated Lighting System - International Version, Black

**CLSI-C6W:** iLux Integrated Lighting System - International Version, White

**CLSI-C6RFA<sup>2</sup>:** iLux Integrated Lighting System w/infiNET - International Version, Almond

**CLSI-C6RFB<sup>2</sup>:** iLux Integrated Lighting System w/infiNET - International Version, Black

**CLSI-C6RFW<sup>2</sup>:** iLux Integrated Lighting System w/infiNET - International Version, White

## **AVAILABLE ACCESSORIES**

**C2N-DB:** Decorator Series Keypad

**CNX-B:** Designer Series Keypad

**C2N-SSC-2:** Somfy® Shade Controller


**C2N-SDC-DC:** Shade and Drape Controller (24V DC)

**CLS-IRHT8:** iLux IR Handheld Remote


**C2N-MNETGW:** infiNET Gateway

**C2NI-MNETRPT:** infiNET Repeater

## Top

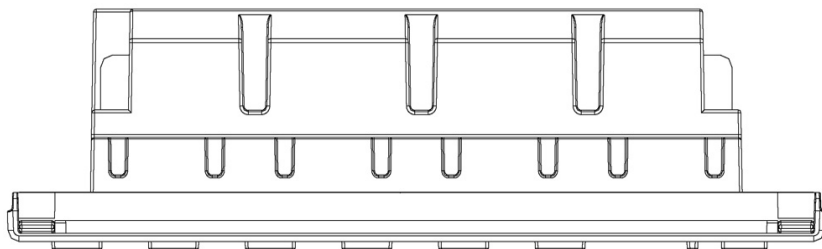

## Front

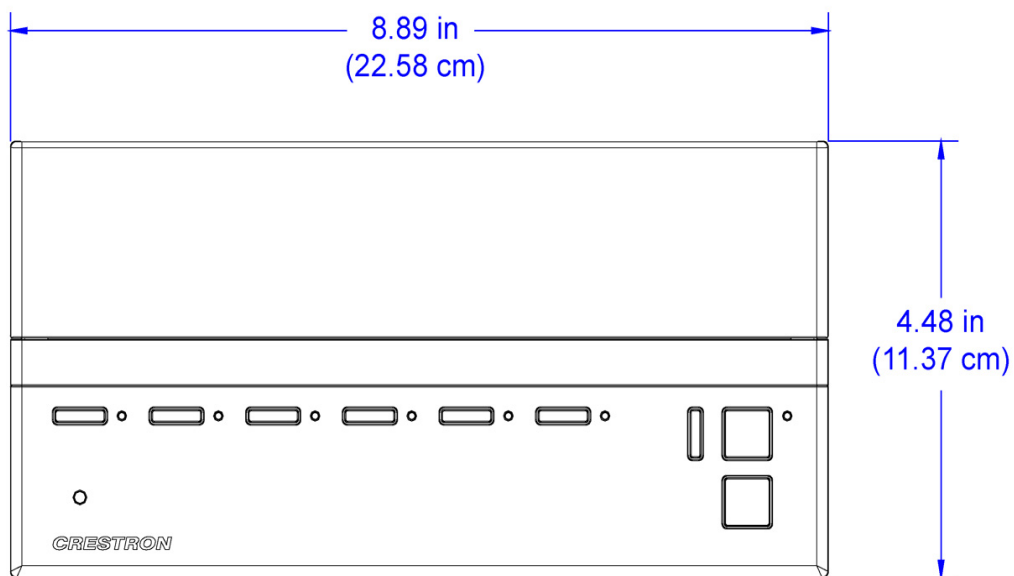

## Side

