

Crestron SmarTouch™ ST-1550C

Economical 5.7" 1-Way Wireless Touchpanel



The ST-1550C is an economical wireless touchpanel featuring a 5.7" passive matrix color touchscreen in a stylish and compact portable design. Long-range RF communications and 256 color graphics combine to deliver excellent, cost-efficient touchpanel performance with complete freedom of movement.

SmarTouch—A SmarTouch touchpanel offers an ideal user-interface for controlling home theater, boardroom AV and a host of other applications, providing a wide-open canvas for the creation of custom control screens tailored to the user's unique needs and tastes. Incredibly compact and portable, the SmarTouch touchpanel does away with piles of remotes and cryptic control panels, affording true "one-touch" control over a broad range of complex devices and systems.

1-Way RF Wireless—Crestron's proven RF wireless technology affords an operational range of up to 300 feet without the line-of-sight limitations typical of cheaper IR (infrared) methods. Long-range 434 MHz 1-way RF communication enables compatibility with any Crestron control system via the CNRFGWA gateway (sold separately). The ST-1550C is also ideal for use with Crestron's MC2W Integrated Wireless Control System, providing a very cost-effective yet powerful room control solution.

Programmable logic built into the ST-1550C enables virtual button feedback and subpages, affording considerable versatility for a 1-way touchpanel to deliver the "feel" of a more expensive 2-way panel.

Long-Life NiMH Batteries—A fast-charging NiMH battery pack is included to provide long-lasting wireless operation, with adjustable power management built in to preserves battery life up to 20 hours in standby.

Docking Station/Charger—Without removing the battery pack, the touchpanel can be placed in the ST-DSN docking station (included) for easy recharging, simultaneously providing operating power to the touchpanel. The docking station may also be used to recharge a spare ST-BTPN battery pack (sold separately). And if necessary, the touchpanel may even be powered directly using the PW-1215 power pack (included).

> 1-way RF Wireless | 300 Foot Range

> 5.7" Passive Matrix Touchscreen Display | 320 x 240 Resolution

> 256 Color Graphics | Audible "Key Click" Feature

> Long-lasting NiMH Batteries | Docking Station/Charger Included

> Lightweight Contoured Design for Tabletop and Handheld Use

SPECIFICATIONS

Touchscreen Display

Display Type: Passive matrix color LCD
Size: 5.7 inch (14.5 cm) diagonal
Resolution: 320 x 240 pixels
Illumination: Backlit fluorescent
Viewing Angle: ±50° horizontal, +40°/-50° vertical
Touchscreen: Resistive membrane

Wireless

RF Transmitter: 433.92 (434) MHz 1-way RF
Range: 300 feet max
CNRFGWA gateway/receiver required (maximum 15 touchpanels per gateway)

Memory

1 MB Flash

Graphics

256 colors

Connectors

Power: (1) 12 Volt DC power jack (PW-1215 power supply included)

Cresnet Upload: (1) 3.5 mm mini TRS phone jack
Connects to Cresnet control network while uploading only

Power Requirements

Battery: ST-BTPN NiMH battery pack, 4.8 Volt, 4100 mAh (included)
Usage per Charge: 4.3 hours continuous use at full brightness, 20 hours in standby
Charging Time: 2.7 to 6 hours (depending upon use while charging)
Docking Station/Charger: ST-DSN (included)
Power Supply: 18 Watts (1.5 Amps @ 12 Volts DC) PW-1215 power supply included

Environmental

Temperature: 50° to 113°F (10° to 45°C)
Humidity: 10% to 90% RH (non-condensing)

Enclosure

Construction: High impact black/silver injection-molded case

Dimensions

Height: 3.69 in (9.37 cm)
Width: 8.75 in (22.23 cm)
Depth: 5.42 in (13.77 cm)

Weight

1.85 lbs (0.84 kg) – not including battery or docking station

SPECIFICATIONS for ST-DSN Docking Station (included with ST-1550C):

Connectors

Power: (1) 12 Volt DC power jack (PW-1215 power supply included)

LED Indicators

Power (Logo): (green) Indicates 12 Volts DC from power supply
CHG: (red) Indicates battery charging status
RDY: (green) Indicates battery is fully charged

Power Requirements

1500 mA @ 12 Volts DC (PW-1215 power supply included)

Environmental

Temperature: 32° to 104°F (0° to 40°C)
Humidity: 10% to 90% RH (non-condensing)

Crestron SmarTouch™ ST-1550C Economical 5.7" 1-Way Wireless Touchpanel

Enclosure

High impact black injection-molded case

Dimensions

Height: 0.94 in (2.38 cm)

Width: 6.72 in (17.06 cm)

Depth: 6.77 in (17.18 cm)

Weight

15.8 ozs (0.49 kg) – not including power supply


INTERNATIONAL VERSION (230 VAC)

STI-1550C


All the features and specifications of the ST-1550C except:

Power Requirements


PWI-1215 power supply included

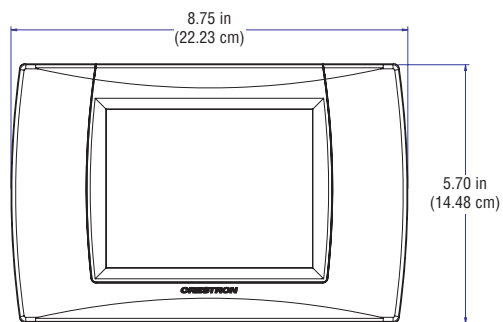


ST-1550C Touchpanel – Top View (face up)

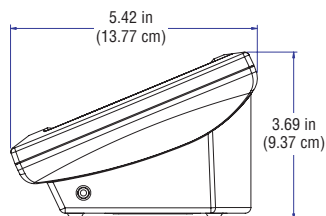


ST-1550C Touchpanel
Right Side View

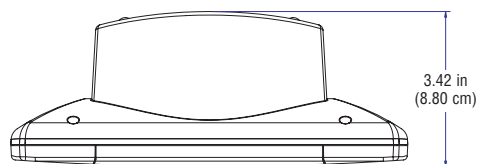

ST-1550C Touchpanel – Rear View (face down)

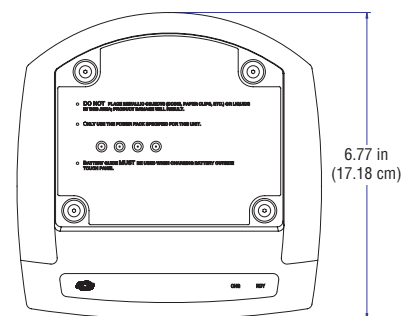

ST-DSN Docking Station – Top View



ST-DSN Docking Station – Front View

AVAILABLE ACCESSORIES



CNRFGWA
1-Way 434 MHz RF Gateway



ST-BTPN
Battery Pack
(1 included)



ST(I)-DSN
Docking Station
(1 included)



PW(I)-1215
Power Supply
(1 included)



ST-PK
Programming Cable
Kit